


Monofocal IOLs

Spherical IOLs

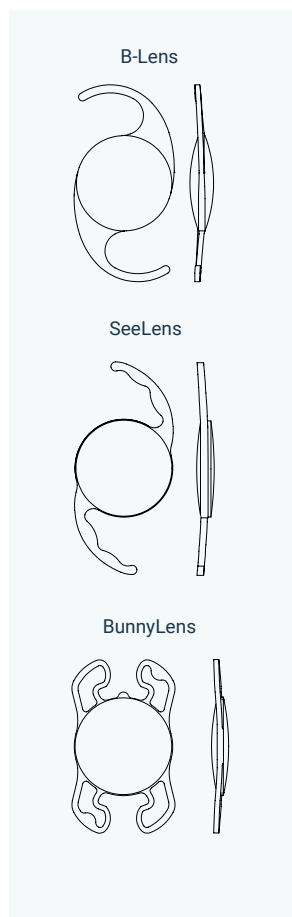

	B-Lens	SeeLens	BunnyLens
Platform	C-Loop	C-Loop	4 - Loop
Overall Diameter	12.5mm	13.0mm	11 mm (>10D) 11.5mm (≤10D)
Placement	Capsular Bag		
Optic diameter	6.0 mm		
Power range	+1.0 to + 8.0 (1 dpt increments)	From 0	
	+8.0 to + 30.0 (0.5 dpt increments) +8.0 to +30.0 (0.5D increments)		
	+30.0 to + 40.0 (1 dpt increments) +30.0 to +40.0 (1D increments)		
Optic design	Spherical		
360° Continuous Square Edge	No	Yes	
Haptic angulation	5°		Yes
Material	Hydrophilic acrylic with bonded UV absorber		
Refractive Index	1.46 (hydrated @ 35°C)		
A-constant (SKR/T) for Optical or Immersion US biometry	118.5	118.6	118.54
A-constant (SKR/T) for Contact US biometry	118.2	118.26	118.2
Sterilization	Steam		

360 Continuous Square Edge

Attributes

- High Biocompatibility
- Excellent biocompatibility and purity of acrylic material based on relevant ISO standards.
- 360 Continuous square edge
- UV Blocker
- Effectively filters UV radiation
- Yag Laser Compatible
- Small incision size
- Easy to fold and inject through an incision of 2.4mm
- Material
- The IOLs are made of hydrophilic acrylic material, with a proven reputation and many years of clinical experience.