


# Monofocal IOLs

## Spheric IOLs

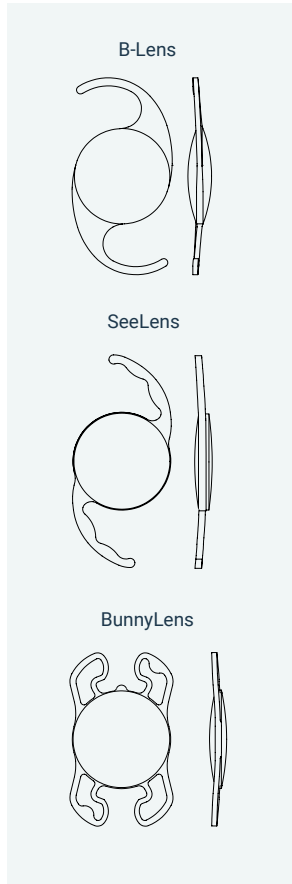

	B-Lens	SeeLens	BunnyLens
Platform	C-Loop	C-Loop	4 - Loop
Overall Diameter	12.5 mm	13 mm	11 mm (≥10D) 11.5 mm (<10D)
Placement	Capsular Bag		
Optic diameter	6 mm		
Power range	+1.0 to +8.0 (1D increments)	0.0 to +8.0 (1D increments)	
	+8.0 to +30.0 (0.5D increments)		
	+30.0 to +40.0 (1D increments)		
Optic design	Spheric		
360° Continuous Square Edge	No	Yes	
Haptic angulation	5°		
Material	Hydrophilic acrylic with bonded UV absorber		
Refractive Index	1.46 (hydrated @ 35°C)		
A-constant (SRK/T) for Optical or Immersion US biometry	118.5	118.6	118.54
A-constant (SRK/T) for Contact US biometry	118.2	118.26	118.2
Sterilization	Steam		

# Robust performance

## Attributes

- The IOLs are made of hydrophilic acrylic material, with a proven reputation and many years of clinical experience.
- 360° continuous square edge
- Effectively filters UV radiation
- Yag Laser compatible
- Easy to fold and inject through an incision of 2.4mm

